



Innovative Power Solutions since 1967

DC-DC Converters

1.5W – 700W

No MOQ


4 – 6 week lead time

Local Distribution


5–10 year warranty

Technical Design-in Support

Global Sales Support

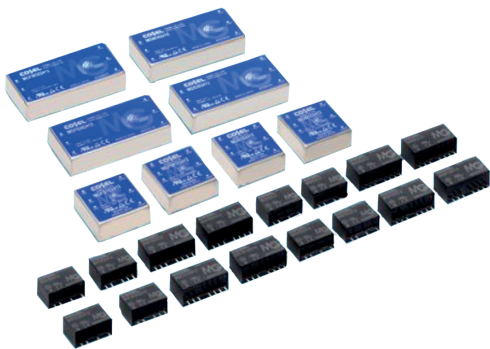

High Power Density DC-DC Converters

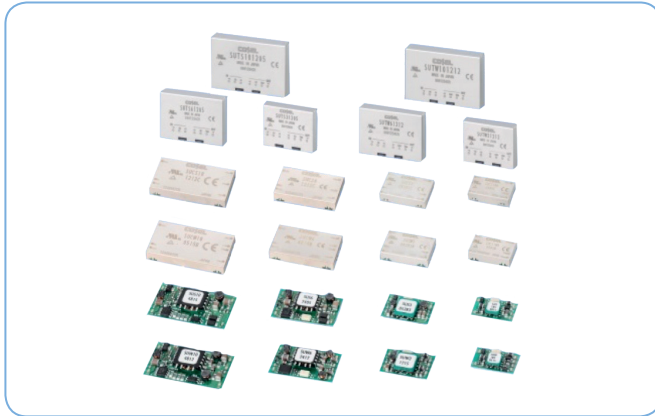

DC-DC Converter Line up:

- 1.5W to 700W output power
- Up to 7kW output power in parallel
- Low Voltage Input starting from DC4.5V
- 2:1 & 4:1 input range
- High Voltage Input DC60-400V
- Single & Dual Output
- Convection or Conduction cooling
- Isolated or Non-Isolated
- SMD, TH/DIP & DIN Rail mounting options
- Various options including Remote On/Off
- Industry Standard Footprints
- Ultra-compact sizes
- Up to 94 % efficiency
- Point of Load
- Optional PMBus
- Enclosed or Open Frame
- Optional parts Eg. Heat Sink
- Suitable for Railway applications
- Expected life up to 30 years
- 5-10 year warranties