

MGFS10

MGF

S

10

24

05

-

①


②

③

④

⑤

⑥

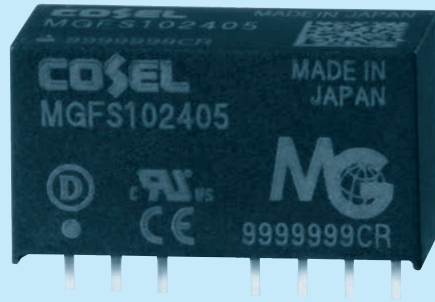

- ① Series name
 ② Single output
 ③ Output wattage
 ④ Input voltage
 ⑤ Output voltage
 ⑥ Optional
 Y2: Output voltage adjustable (+10%, -5%)

MODEL	MGFS10243R3	MGFS102405	MGFS102412	MGFS102415
MAX OUTPUT WATTAGE[W]	8.58	10.0	10.8	10.5
DC OUTPUT	VOLTAGE[V]	3.3	5	12
	CURRENT[A]	2.6	2.0	0.9

SPECIFICATIONS

	MODEL	MGFS10243R3	MGFS102405	MGFS102412	MGFS102415
INPUT	VOLTAGE[V]	DC9 - 36 (Surge voltage 50V,100ms max) (Refer to the instruction manual for input voltage derating.)			
	CURRENT[A]	*1 0.42typ	0.48typ	0.51typ	0.50typ
	EFFICIENCY[%]	*1 86typ	88typ	89typ	89typ
OUTPUT	VOLTAGE[V]	3.3	5	12	15
	CURRENT[A]	2.6	2.0	0.9	0.7
	LINE REGULATION[mV]	20max	20max	48max	60max
	LOAD REGULATION[mV]	20max	20max	48max	60max
	RIPPLE[mVp-p]	lo=30% - 75max	75max	100max	100max
		*2 lo=0 - 30% 225max	225max	300max	300max
	RIPPLE NOISE[mVp-p]	lo=30% - 120max	120max	150max	150max
		*2 lo=0 - 30% 300max	300max	400max	400max
	TEMPERATURE REGULATION[mV]	-20 to +55°C 50max	50max	150max	180max
		-40 to +55°C 80max	80max	240max	290max
PROTECTION CIRCUIT AND OTHERS	DRIFT[mV]	*3 20max	20max	48max	60max
	START-UP TIME[ms]	30max (Minimum input, lo=100%)			
	OUTPUT VOLTAGE SETTING[V]	3.21 - 3.42	4.90 - 5.21	11.64 - 12.36	14.55 - 15.45
	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically			
PROTECTION CIRCUIT AND OTHERS	REMOTE ON/OFF	Provided (Negative logic L : ON, H : OFF)			

MODEL	MGFS10483R3	MGFS104805	MGFS104812	MGFS104815
MAX OUTPUT WATTAGE[W]	8.58	10.0	10.8	10.5
DC OUTPUT	VOLTAGE[V]	3.3	5	12
	CURRENT[A]	2.6	2.0	0.9

SPECIFICATIONS

	MODEL	MGFS10483R3	MGFS104805	MGFS104812	MGFS104815
INPUT	VOLTAGE[V]	DC18 - 76 (Surge voltage 100V,100ms max) (Refer to the instruction manual for input voltage derating.)			
	CURRENT[A]	*1 0.21typ	0.24typ	0.26typ	0.25typ
	EFFICIENCY[%]	*1 86typ	88typ	89typ	89typ
OUTPUT	VOLTAGE[V]	3.3	5	12	15
	CURRENT[A]	2.6	2.0	0.9	0.7
	LINE REGULATION[mV]	20max	20max	48max	60max
	LOAD REGULATION[mV]	20max	20max	48max	60max
	RIPPLE[mVp-p]	lo=30% - 75max	75max	100max	100max
		*2 lo=0 - 30% 225max	225max	300max	300max
	RIPPLE NOISE[mVp-p]	lo=30% - 120max	120max	150max	150max
		*2 lo=0 - 30% 300max	300max	400max	400max
	TEMPERATURE REGULATION[mV]	-20 to +55°C 50max	50max	150max	180max
		-40 to +55°C 80max	80max	240max	290max
PROTECTION CIRCUIT AND OTHERS	DRIFT[mV]	*3 20max	20max	48max	60max
	START-UP TIME[ms]	30max (Minimum input, lo=100%)			
	OUTPUT VOLTAGE SETTING[V]	3.21 - 3.42	4.90 - 5.21	11.64 - 12.36	14.55 - 15.45
	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically			
PROTECTION CIRCUIT AND OTHERS	REMOTE ON/OFF	Provided (Negative logic L : ON, H : OFF)			

