


MGFW6

MGF W 6 24 12 -□

① ② ③ ④ ⑤ ⑥

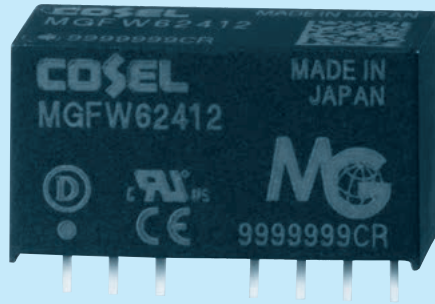

- ① Series name
 ② Dual output
 ③ Output wattage
 ④ Input voltage
 ⑤ Output voltage
 ⑥ Optional
 Y2: Output voltage adjustable (+10%, -5%)

MODEL	MGFW62412	MGFW62415	MGFW64812	MGFW64815
MAX OUTPUT WATTAGE[W]	6.00	6.00	6.00	6.00
DC OUTPUT	VOLTAGE[V] *1	±12 or +24	±12 or +24	±15 or +30
	CURRENT[A]	0.25	0.2	0.25

SPECIFICATIONS

	MODEL	MGFW62412	MGFW62415	MGFW64812	MGFW64815
INPUT	VOLTAGE[V]	DC9 - 36 (Surge voltage 50V,100ms max)		DC18 - 76 (Surge voltage 100V,100ms max)	
	CURRENT[A] *2	0.29typ	0.29typ	0.15typ	0.15typ
	EFFICIENCY[%] *2	87typ	88typ	88typ	88typ
OUTPUT	VOLTAGE[V]	±12 (+24)	±15 (+30)	±12 (+24)	±15 (+30)
	CURRENT[A]	0.25	0.2	0.25	0.2
	LINE REGULATION[mV]	60max	75max	60max	75max
	LOAD REGULATION[mV]	*3 480max	600max	480max	600max
		*4 600max	750max	600max	750max
	RIPPLE[mVp-p] *5	Po=30% - 120max	120max	120max	120max
		Po=0 - 30% 360max	360max	360max	360max
	RIPPLE NOISE[mVp-p] *5	Po=30% - 200max	200max	200max	200max
		Po=0 - 30% 500max	500max	500max	500max
	TEMPERATURE REGULATION[mV]	-20 to +75°C 190max -40 to +75°C 300max	230max 360max	190max 300max	230max 360max
	DRIFT[mV] *6	48max	60max	48max	60max
PROTECTION CIRCUIT AND OTHERS	START-UP TIME[ms]	30max (Minimum input, Io=100%)			
	OUTPUT VOLTAGE SETTING[V]	11.64 - 12.36	14.55 - 15.45	11.64 - 12.36	14.55 - 15.45
	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically			
ISOLATION	REMOTE ON/OFF	Provided (Negative logic L : ON, H : OFF)			
	INPUT-OUTPUT	DC1,500V or AC1,000V 1minute, Cutoff current=10mA, DC500V 1,000MΩ min (20±15°C)			
ENVIRONMENT	OPERATING TEMP., HUMID. AND ALTITUDE	-40 to +85°C, 20 to 95%RH (Non condensing) (Required derating), 5,000m (16,400feet) max			
	STORAGE TEMP., HUMID. AND ALTITUDE	-40 to +100°C, 20 to 95%RH (Non condensing), 9,000m (30,000feet) max			
	VIBRATION	10 - 55Hz 98.0m/s ² (10G), 3minute period, 60minutes each along X, Y and Z axis			
	IMPACT	490.3m/s ² (50G) 11ms, once each along X, Y and Z axis			
SAFETY	AGENCY APPROVALS	UL60950-1, C-UL, EN60950-1			
OTHERS	CASE SIZE/WEIGHT	22.0×12.0×9.5mm [0.87×0.48×0.38 inches] (W×H×D) / 7g max			
	COOLING METHOD	Convection/Forced air			

*1 Single output +24V, +30V with no use of COM.

*2 Rated input 5V, 12V, 24V or 48V DC Io=100%

*3 Symmetrical loading from 20% to 100%.



*4 Symmetrical loading from 0% to 100%.

*5 Ripple and Ripple Noise is measured by using test board with ceramic capacitor 1μF at 50mm from output pins. Po: Output wattage.

*6 Drift is the DC output accuracy for eight hours period after a half-hour warm-up at 25°C.

* Parallel operation with other model is not possible.

External view

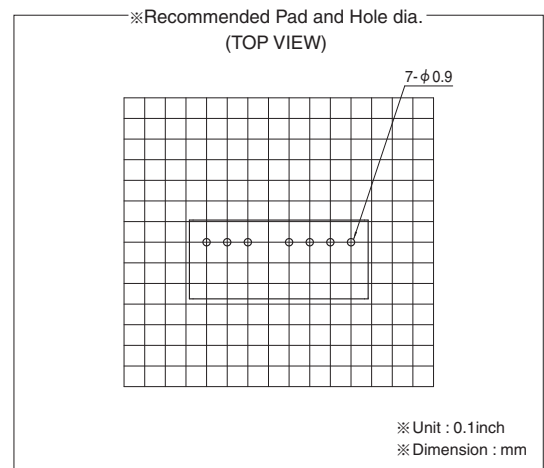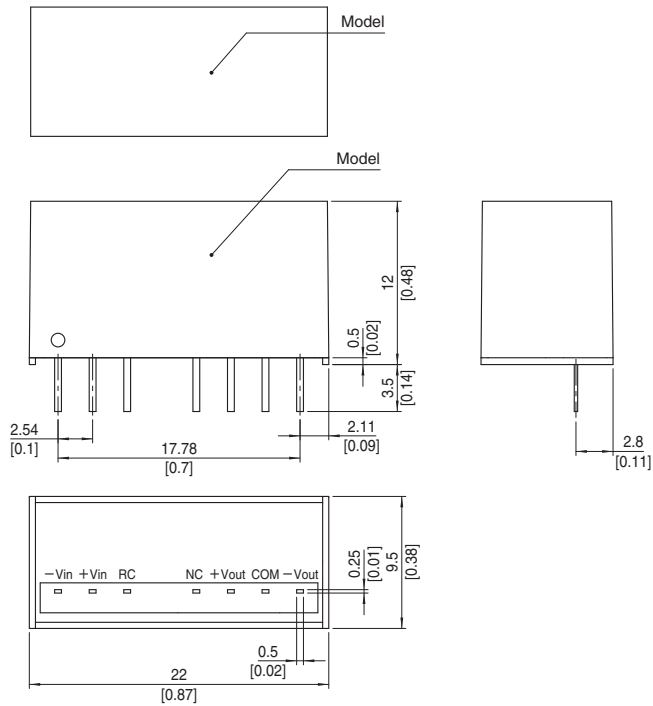

- ※ Tolerance ± 0.5 [± 0.02]
- ※ Dimensions in mm, []= inches
- ※ Pin terminal material : Copper
- ※ Planting treatment of terminal : Lead free plating
- ※ Case material : PBT
- ※ Weight 7g max

